


**APPLICATIONS**

THIS DAMPER IS DESIGNED TO BE USED WHEN FITTING A SOLATUBE 290DS DAYLIGHTING SYSTEM THROUGH A 1 HOUR FIRE RATED CEILING.

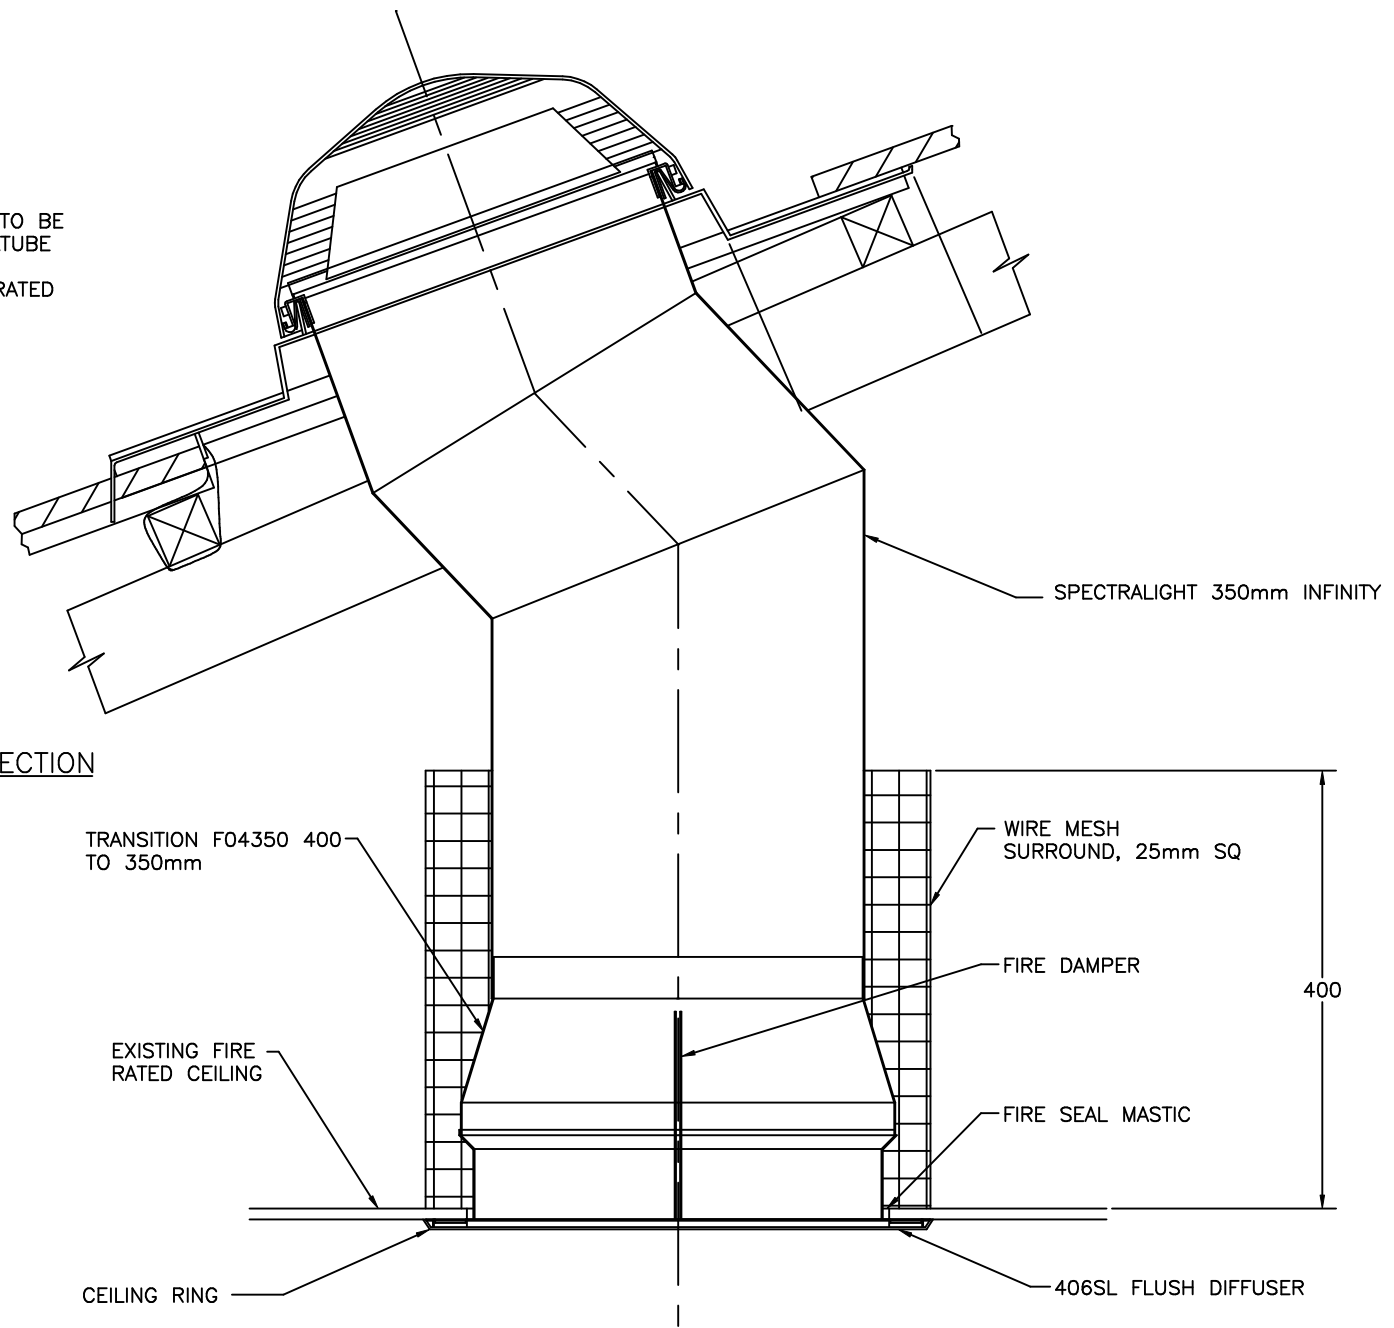

TYPICAL CROSS-SECTION  
SCALE 1:5

TRANSITION F04350 400 TO 350mm

EXISTING FIRE RATED CEILING

CEILING RING

SPECTRALIGHT 350mm INFINITY

WIRE MESH SURROUND, 25mm SQ

FIRE DAMPER

FIRE SEAL MASTIC

400

406SL FLUSH DIFFUSER

PHONE: 0800 466-383  
WEB: www.homotech.co.nz

**SOLATUBE.**  
Innovation in Daylighting...  
Copyright  
Trademarks and Patents registered.  
Authorised Distributor  
HomeTech Limited: New Zealand.

FIRE RATED DAYLIGHTING SOLATUBE 290DS DAYLIGHTING SYSTEM FIRE DAMPER  
CODE 290DSF04350  
INSTALLATION: INSTALLED BY A HOMETECH SOLATUBE CERTIFIED INSTALLATION CONSULTANT AS PER SOLATUBE INTERNATIONAL MANUFACTURING SPECIFICATION ● 2011 HomeTech Ltd

DRAWN	PCR	REVISION	E
DATE	22/10/16	SCALE	1:5
APPROVED	PN	DWG NO.	290DSFD4350
DATE	22/10/16		